
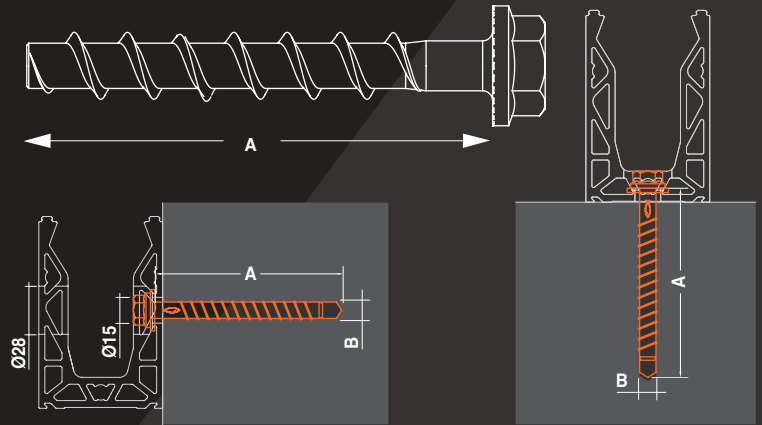


## CONCRETE SCREW

Material: zinc-plated steel/ A4 stainless steel  
Features: high-performance mechanical screw.  
Resistance class from C20/25 to C50/60.  
For cracked and non-cracked concrete.

**Package: 15 Pcs**



Art.	A-screw length	B-Ø drill hole	Drill hole depth	Wrench size	Material	Q.ty
<b>DFFH10ZN</b>	100 mm	10 mm	110 mm	SW16	Zinc-plated steel	1 Kit
<b>DFFH10A4</b>	100 mm	10 mm	110 mm	SW16	A4 stainless steel	1 Kit
<b>DFFH12ZN</b>	110 mm	12 mm	120 mm	SW17	Zinc-plated steel	1 Kit
<b>DFFH12A4</b>	110 mm	12 mm	120 mm	SW17	A4 stainless steel	1 Kit

	Recommended nominal tightening torque of pulse screwdrivers [Nm]	Max. tightening torque with a torque or a ratchet key [Nm]
<b>DFFH10ZN</b>	300	40
<b>DFFH10A4</b>	300	40
<b>DFFH12ZN</b>	450	60
<b>DFFH12A4</b>	450	60

	Cracked concrete				Non-cracked concrete			
	Max. traction load [kN]	Max. cutting force [kN]	Min. hole interaxis [mm]	Min. edge distance [mm]	Max. traction load [kN]	Max. cutting force [kN]	Min. hole interaxis [mm]	Min. edge distance [mm]
<b>DFFH10ZN</b>	7,6	16,2	70	70	13,5	16,2	70	70
<b>DFFH10A4</b>	7,6	19,0	70	70	13,5	19,0	70	70
<b>DFFH12ZN</b>	12,3	20,0	80	80	17,2	20,0	80	80
<b>DFFH12A4</b>	12,3	23,3	80	80	17,2	23,3	80	80

Further technical information available on [www.loglimassimo.it](http://www.loglimassimo.it)